

ROBOTICS

IRB 8700

High payload robot



The IRB 8700 is ABB's 8th generation of heavy payload, high performance industrial robots. With a focus on high production capacity, compact design, simple service, and low maintenance cost, the IRB 8700 offers a general-purpose robot with the handling capacity and sustainability to meet even your heaviest demands.

In designing the IRB 8700, ABB focused on delivering a reliable robot with a low total cost of ownership. Through a combination of robust design elements, including simpler parts configurations where possible, ABB Robotics applied decades of engineering experience to combine the high performance customers require with low overall maintenance needs. In addition, the IRB 8700 delivers 25% faster speeds than any other robot in this class size.

Outstanding reliability

With a straightforward and uncomplicated design that uses world-class components, LeanID for the best cost-to-endurance ratio in a dress pack, and ABB's Foundry Plus 2 as standard protection, the IRB 8700 will run with very high uptime—a key feature in production lines that operate around the clock.

Simplified design

The IRB 8700 has only one motor and one gear per robot axis, while most other robots in this size class use dual motors and/or gears. In addition, there are no gas springs that can leak and cause safety problems, only a reliable counterweight and mechanical springs for counter balancing. Together these design elements mean fewer components to fail while delivering shorter cycle times and higher accuracy.

Built around LeanID

With LeanID, ABB has developed a concept that is less expensive than completely integrated dress packs but still delivers most of the benefits for a fraction of

the cost. LeanID results in a robot that is easy to simulate in offline programming, has a long dress pack lifetime, supports flexible production with a large working range, and can easily enter tight spaces.

Fast

High payload robots are typically known as being very slow, but the IRB 8700 turns these assumptions on their head. With a compact footprint, optimized counterweight, parallel linkages, stiff axes, and fewer drive motors, the IRB 8700 keeps its momentum down and speed up. In fact, all of these improvements add up to a robot that is 25 % faster than any other robot in its size class. In addition, thanks to superior motion control at high moments of inertia (725 kgm²) the robot can adapt, or slow its speed, to accommodate heavy and wide parts.

Sustainable

The IRB 8700 fully complies with environmental directive RoHS 2002/95/EC and Reach No1907/2006 directives for using non-hazardous materials, resulting in a robot that is safer for work environments.

Features and benefits

- High payloads up to 1000 kg with the wrist down
- 25% faster speeds than other robots in size class
- Highly reliable with simplified design and Foundry Plus 2 protection standard
- Built around LeanID for reduced wear on dress packs and ease of simulation
- Built using non-hazardous materials

Specification without LeanID

Robot version	Reach (m)	Handling capacity (kg)	Center of gravity (mm)	Wrist torque (Nm)
IRB 8700-800/3.50	3.50	800*	460	6043
IRB 8700-550/4.20	4.20	550	460	5279
Extra loads can be mounted on all variants. 50 kg on upper arm and 250 kg on frame of axis 1. *The load is up to 1000 kg while the wrist is down.				
Number of axes	6			
Protection	Std IP67, Foundry Plus 2			
Mounting	Floor mounted			
Controller	IRC5 Single cabinet			

Performance

	Position repeatability RP (mm)	Path repeatability RT (mm):
IRB 8700-800/3.50	0.05	0.07
IRB 8700-550/4.20	0.08	0.14

Specification with LeanID

Robot version	Reach (m)	Handling capacity (kg)	Center of gravity (mm)	Wrist torque (Nm)
IRB 8700-800/3.50	3.50	630	460	6043
IRB 8700-550/4.20	4.20	475	460	5279
Extra loads can be mounted on all variants. 50 kg on upper arm and 250 kg on frame of axis 1.				
Number of axes	6			
Protection	Complete robot IP 67			
Mounting	Floor mounted			
Controller	IRC5 Single cabinet			

Technical information

Electrical Connections

Supply voltage	200-600 V, 50/60 Hz
Energy consumption	3.93 kW

Physical

Dimensions robot base	1175 x 920 mm
Weight (without DressPack)	
IRB 8700-800/3.50	4575 kg
IRB 8700-550/4.20	4525 kg

Environment

Ambient temperature for mechanical unit	
During operation	+5°C (41°F) to +50°C (122°F)
During transportation and storage for short periods (max 24h)	-25°C (-13°F) to +55°C (+131°F)
Relative humidity	Max. 95%
Noise level	Max. 71 dB (A)
Safety	Double circuits with supervision, emergency stops and safety functions, 3-position enable device
Extended safety	SafeMove2
Emission	EMC/EMI-shielded
Options	Foundry Plus 2 LeanID

Data and dimensions may be changed without notice.

ABB AB Robotics
Hydrovägen 10 SE-721 36
Västerås, Sweden
Phone: +46 21325000

ABB Engineering (Shanghai) Ltd.
No. 4528, Kangxin Highway,
Pudong New District,
Shanghai, 201319, China
Phone: +86 21 6105 6666


We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.
Copyright© 2017 ABB
All rights reserved

IRB 8700-800/3.50

Axis movement	Working range	Axis max speed
Axis 1 rotation	±170° to ±170° Option: ±220° to ±220°	75°/s
Axis 2 arm	-65°/+90°	60°/s
Axis 3 arm	-30°/+132°	60°/s
Axis 4 wrist	±300° to ±300°	85°/s
Axis 5 bend	±130° to ±130°	85°/s
Axis 6 turn	±360° to ±360°	115°/s

IRB 8700-800/3.50, working range

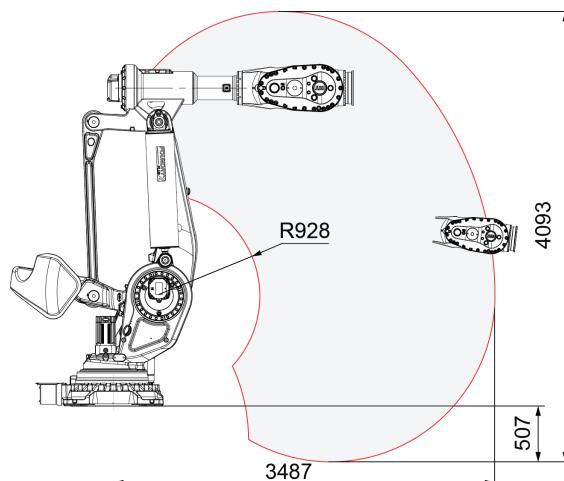

IRB 8700-550/4.20

Axis movement	Working range	Axis max speed
Axis 1 rotation	±170° to ±170° Option: ±220° to ±220°	75°/s
Axis 2 arm	-65°/+90°	60°/s
Axis 3 arm	-30°/+132°	60°/s
Axis 4 wrist	±300° to ±300°	85°/s
Axis 5 bend	±130° to ±130°	85°/s
Axis 6 turn	±360° to ±360°	115°/s

IRB 8700-550/4.20, working range

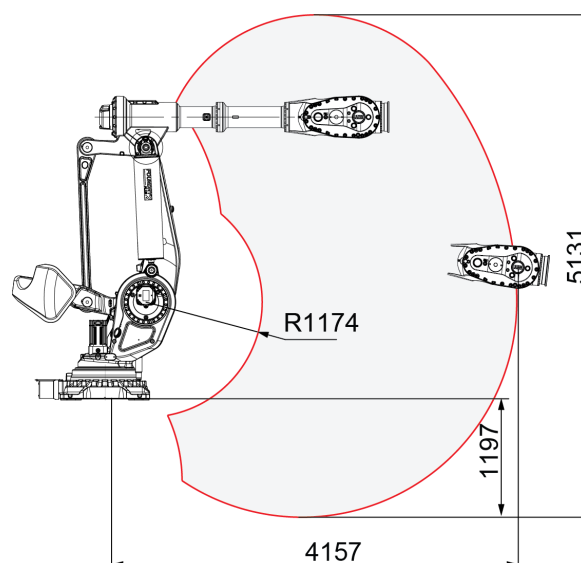


ABB AB Robotics
Hydrovägen 10 SE-721 36
Västerås, Sweden
Phone: +46 21325000

ABB Engineering (Shanghai) Ltd.
No. 4528, Kangxin Highway,
Pudong New District,
Shanghai, 201319, China
Phone: +86 21 6105 6666

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.
Copyright © 2017 ABB
All rights reserved

ABB AB Robotics
Hydrovägen 10 SE-721 36
Västerås, Sweden
Phone: +46 21325000

ABB Engineering (Shanghai) Ltd.
No. 4528, Kangxin Highway,
Pudong New District,
Shanghai, 201319, China
Phone: +86 21 6105 6666

abb.com/robotics

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.
Copyright© 2017 ABB
All rights reserved